


56 - DUTCH DOOR QUADRANT

888-371-7331

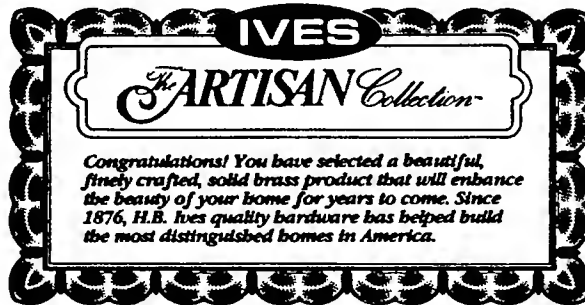

DUTCH DOOR QUADRANT


FOR USE ON DUTCH DOORS. Provides easy, positive latching of doors. Holds its position — Heavy spring washer provides constant tension. NON-HANDED Quadrant may be installed on either left or right hand opening doors.

INSTALLATION INSTRUCTIONS

TOOLS REQUIRED Drill, 1/8" drill bit for pilot holes, Phillips screwdriver and pencil.

1. Position Quadrant (as shown in illustration) and measure 1-3/16" down from point where doors meet. Mark screw holes of Quadrant plate, drill and secure.
2. Measure up vertically 2-5/16" from center of top screw holes of Quadrant plate and mark centers of bottom screw holes of knob plate.
3. Holding knob plate in place, swing Quadrant into lock position and check alignment. Drill and secure.

NOTE: When door is locked, it is important that top section of door be locked to side jamb for added security. Recommended use of IVES C-054 OR C55 DUTCH DOOR BOLTS.

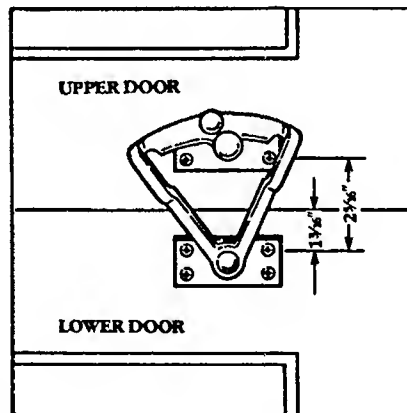

MAINTENANCE INSTRUCTIONS

H.B. Ives Solid Brass products have a clear, protective lacquer coating which helps prevent discoloration. Do not use abrasive waxes or cleaners.

ASK FOR OTHER FINE DECORATIVE HARDWARE BY H.B. IVES



SURFACE
BOLTS



DUTCH
DOOR BOLTS



DUTCH DOOR
QUADRANT



DELUXE
SURFACE BOLTS




DUTCH DOOR QUADRANT C56 B3 BRT

MADE IN U.S.A.

IVES No. 56 MADE IN U.S.A. **DUTCH DOOR QUADRANT**

This illustration shows the Ives non-handed Dutch Door Quadrant properly applied. When the door is locked it is important that the top section be locked to the side jamb with a suitable dead bolt for added security and to prevent undue stress on the Quadrant.

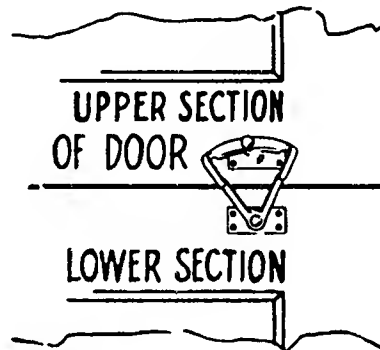

P.N. 127972

H.B. IVES
A HARROW COMPANY
P.O. BOX 1887, NEW HAVEN, CONN. 06508